


DS1/DS1C/DS2 Transport System Cable

26 AWG STC, Dual Shield, Riser (1249C Equiv.)

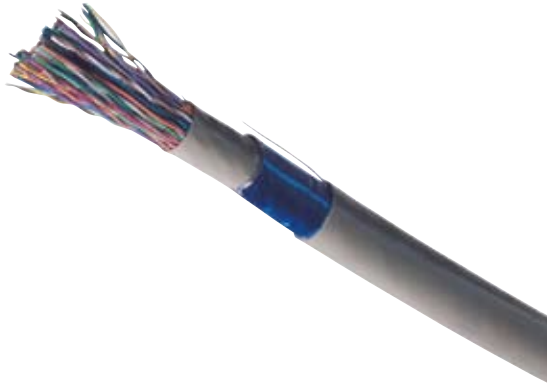

ADC provides exceptional 100-Ohm central office copper cables for both analog and digital services. Reducing electromagnetic interference (noise) and maintaining signal integrity enriches data throughput. The improved crosstalk and attenuation of ADC's central office copper cables helps to eliminate throughput bottlenecks at high speeds. Enhanced throughput translates to decreased service downtime and increased customer satisfaction.

As high-speed services move closer and closer to the subscriber premise, size and space become significant obstacles. Many of ADC's central office copper cables have been designed with smaller outside diameters and cross-sectional areas without giving up performance to meet the demanding space requirements of cabinets and remote terminals. ADC's central office copper cables are chosen for their excellent quality, performance, size, and flexibility in many applications, including digital voice, data and video. In addition, ADC's central office copper cables adhere to industry standards and known environmental regulations.

SPEC SHEET



www.adc.com • +1-952-938-8080 • 1-800-366-3891



DS1/DS1C/DS2 Transport System Cable

26 AWG STC, Dual Shield, Riser (1249C Equiv.)

Benefits:

- Combines innovative design and application engineering to deliver a cabling solution that exceeds your network's physical layer requirements
- Offers improved crosstalk and attenuation performance to deliver the bandwidth required for digital voice, data and video
- Helps eliminate throughput bottlenecks and service downtime, improving customer satisfaction
- Provides consistent product quality
 - No missing insulation, no excess adhesion
 - Tangle-free, kink-free
 - Jacket and insulation concentricity and cable roundness
 - Small outside diameter and cross-sectional area in bundles and cable
 - Streamlined engineering, production and quality processes
 - In-process manufacturing quality inspections
- Meets or exceeds industry requirements and environmental regulations
 - Heavy-metal free (i.e. cadmium, lead, mercury, etc.)
 - Compliant to Directive 2002/95/EC Restriction of the use of certain Hazardous Substances (RoHS) and other known environmental regulations
- Provides exceptional design and enhanced electrical and mechanical performance.
- Adheres to strict industry tolerance standards and customer specifications for use throughout major service provider networks around the world

Common Applications:

- Central office, including main distribution frames, collocation, digital switching and transmission equipment
- Outside plant networks, including CEV's, cabinets, remote terminals, and at customer premise
- FTTN, where copper cable is required from the ONT to the MDU
- Cable assemblies to connect active equipment in CO, OSP and customer premise
- Copper Broadband Technologies, including
 - Digital Voice, Data (xDSL) and Video (IPTV)
 - DS1/T1
 - DS2/T2
 - DS1C
 - Basic and Primary Rate ISDN
 - 4/16 Mbps Token Ring (IEEE 802.5)
 - 10BASE-T (IEEE 802.3)
 - 52 Mbps ATM (ATM Forum)
 - 100BASE-T4 (Fast Ethernet)
 - 100VG-AnyLAN (IEEE 802.12)

1/10 • 101300AE DS1/DS1C/DS2 Transport System Cable



DS1/DS1C/DS2 Transport System Cable

26 AWG STC, Dual Shield, Riser (1249C Equiv.)

Compliances:

- UL Subject 444/CSA C22.2 No. 214
- (UL)-C(UL) Type CMR
- ICEA S-80-576
- Telcordia Technical Audit Report AU-833 Compliance testing to GR-137-CORE
- Telcordia GR-499 DSX-1 Pulse Wave Shape Compliance at 450 feet

Specifications

CONSTRUCTION CHARACTERISTICS

Conductors:	26 AWG solid tinned copper
Insulation:	Polyolefin
Insulation diameter:	0.76 mm (.030") nominal
Pairing:	Tight lays
Shielding:	Dual aluminum/polyester
Drain wire:	24 AWG solid tinned copper
Color-coding:	Standard telephony, solid colors
Rip cord:	Non-hygroscopic and non-wicking
Jacket:	Dual, Lead-free flame retardant PVC

ELECTRICAL CHARACTERISTICS

Conductor DC resistance (maximum):	15 Ω /100 m (46.0 Ω /1000') @ 20° C (68° F)
Resistance unbalance (maximum):	5%
Insulation resistance:	164 m Ω /100 m (500 m Ω /1000') @ 20° C (68° F)
Mutual capacitance:	6.5 nF/100 m (20.0 pF/ft) nominal @ 1 kHz
Characteristic impedance:	100 \pm 15 Ohms @ 1 MHz
Crosstalk:	43 dB @ .772 MHz 40 dB @ 1.575 MHz 32 dB @ 3.156 MHz
Temperature rating:	75° C (167° F)
Voltage rating:	300 VDC

Nominal Attenuation:

Signal	Frequency (MHz)	Bit Rate	(dB/1000')	(dB/100m)
DS1	.772	1.544	5.5	1.8
DS1C	1.575	3.152	7.8	2.6
DS2	3.156	6.312	10.8	3.6

*See back cover for ordering information.

1/10 • 101300AE DS1/DS1C/DS2 Transport System Cable

Ordering Information

Description	Number of Pairs	Unit Makeup	Outer Diameter mm (inches)	Weight Kg/Km (lbs/1000')	Catalog Number
26 AWG Dual Shield FTP Riser Jacket color: Gray Packaging: Reel Equivalent to 1249C Series *To designate reel length, replace XX as follows: 02 = 304 m (1000 ft) 04 = 609 m (2000 ft) 05 = 762 m (2500 ft) 06 = 914 m (3000 ft) 10 = 1524 m (5000 ft)	4	None	7.6 (.30)	49 (33)	DSR-04261DDGYXX
	6	None	7.9 (.31)	51 (34)	DSR-06261DDGYXX
	8	None	8.2 (.32)	76 (51)	DSR-08261DDGYXX
	12	None	8.9 (.35)	88 (59)	DSR-12261DDGYXX
	16	None	9.1 (.36)	108 (67)	DSR-16261DDGYXX
	20	None	9.4 (.37)	122 (82)	DSR-20261DDGYXX
	25	None	11.4 (.45)	140 (94)	DSR-25261DDGYXX
	28	1 @ 25, 1 @ 3	11.7 (.46)	149 (100)	DSR-28261DDGYXX
	30	1 @ 25, 1 @ 5	11.7 (.46)	164 (110)	DSR-30261DDGYXX
	32	1 @ 25, 1 @ 7	11.9 (.47)	179 (120)	DSR-32261DDGYXX
	50	2 @ 12, 2 @ 13	15 (.59)	283 (190)	DSR-50261DDGYXX
	56	2 @ 20, 1 @ 16	15.2 (.60)	290 (195)	DSR-56261DDGYXX
	100	4 @ 25	18.8 (.74)	580 (390)	DSR-00261DDGYXX

SPEC SHEET



Website: www.adc.com

From North America, Call Toll Free: 1-800-366-3891 • Outside of North America: +1-952-938-8080

Fax: +1-952-917-3237 • For a listing of ADC's global sales office locations, please refer to our website.

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

101300AE 1/10 Revision © 2009, 2006 ADC Telecommunications, Inc. All Rights Reserved